

SEASONAL POLLUTANT REMOVAL BY *LACTUCA SATIVA*, *MEDICAGO SATIVA* AND *PHRAGMITES AUSTRALIS* IN CONSTRUCTED WETLANDS

AMINSHAREI, F.¹ – BORGHEI, S. M.^{2*} – ARJOMANDI, R.¹ – NOURI, J.¹ – PENDASHTEH, A.³

¹Department of Environmental Management, Science and Research Branch,
Islamic Azad University, Tehran, Iran

²Biochemical and Bioenvironmental Research Center,
Sharif University of Technology, Tehran, Iran

³The Caspian Sea Basin Research Center
University of Gilan, Rasht, Iran

*Corresponding author
e-mail: mborghei22@gmail.com

(Received 13th Dec 2016; accepted 24th Mar 2017)

Abstract. The main objective of this study was to compare the removal efficiency of nutrients using *Lactuca sativa*, *Medicago sativa* and *Phragmites australis* in subsurface flow constructed wetlands with horizontal flow. In order to test water quality, fabricated reactors designed and the plants cultivated in the soil while their root were inside the wastewater. A long time study carried out from spring till end of autumn (9 months) in order to evaluate the difference in removal rate based on the seasonal changes. The highest removal rate was during summer which followed by spring and autumn. Thus, the effect of plants on the removal efficiency of organic matter (COD, BOD), TSS and nutrient (P and TN) appeared to be dependent on the seasonal growth. *Phragmites australis* the most sensitive species in order the removal of nutrient from wastewater.

Keywords: subsurface flow constructed wetland, nutrient removal, wastewater treatment; *Lactuca sativa*, *Medicago sativa*, *Phragmites australis*

Introduction

Today, constructed wetlands are recognized as a reliable wastewater treatment technology and they represent a suitable solution for the treatment of many types of wastewater. Constructed wetlands have been used extensively across the world for treating wastewater due to its low cost and efficiency in removal of pollutants (Vymazal, 2010). Wastewater treatment in wetland occurred by a process named phytoremediation that is a moderately late innovation and is seen as practical, proficient, novel, eco-friendly technology, still in its initial improvement stages and full scale applications are still constrained (Rezania et al., 2015). Wide range of wastewaters such as municipal, industrial, agricultural, and storm water can be remediated in constructed wetland (CWs) (Pedescoll et al., 2015; Qasaimeh et al., 2015). In addition, CWs is a flexible and effective method for treating and reusing wastewater with less greenhouse gas emission (Chen et al., 2011).

Generally, the major functions of plants in CWs is to create conditions suitable for removal of pollutants and the direct role of plants is limited to uptake of nutrients and heavy metals (Marchand et al., 2010). Brisson and Chazarenc (2009) showed that some environmental factors like temperature, pH, solar radiation and water salinity can influence plant growth and its performance in phytoremediation. The importance of

these parameters are related to size, weight and growth rate of aquatic plants (Lissy and Madhu, 2010).

Based on Tanner (2001), wetland plants provide only small improvements in biological oxygen demand (BOD), chemical oxygen demand (COD) and faecal bacterial indicator removal but provide measurable enhancement of nutrient removal, mainly by promoting transformations to gaseous forms and sequestration in accumulating organic matter. As extensively reviewed by Engloner (Engloner, 2009), considering the worldwide distribution, *Phragmites* dominated wetlands may have a considerable effect on climate change. Because of this issue, the significance of common reed in scientific research will be on-going in the future studies. *Phragmites australis* is the most often used plant in CWs although a large diversity of species can be used and the genus *Typha* and *Scirpus* are commonly used (Vymazal, 2013). As described by Engloner (2004), water availability is an important factor in shoot which is longer in wetter than drier habitats (with maximum water depths 40-0 and -30 cm, respectively).

In the Czech Republic, horizontal subsurface flow CWs are mostly planted with *Phragmites australis* (Common reed) or *Phalaris arundinacea* (Reed canarygrass) or with a combination of these two species. Some factors like: (1) excellent germination from the seeds, (2) easy planting, (3) fast growth, creating full cover of the surface during the first growing season if planted in spring, and (4) provision of good insulation during the winter (Vymazal, 2013). *P. australis* aboveground biomass in HF CWs varies widely between the values $< 1000 \text{ g m}^{-2}$ to more than 11,000 (g/m^{-2}) on dry matter basis and growing in natural stands also varies greatly within the similar range as in constructed wetlands (Vymazal and Březinová, 2016). As the nitrogen and phosphorus are essential elements for plants and living beings, meanwhile domestic and industrial wastewater which is not fully treated can be among the most important factors that threatens the water quality (Chang et al., 2006). There has been a growing evidence that constructed wetlands with emergent vegetation are more efficient as compared to unplanted filters and that some species are more efficient than the other ones (Zhang et al., 2010).

The objective of this study was to determine the effect of nutrient removal by *Medicago sativa*, *Lactuca sativa*, *Phragmites australis* and mixture of (*Medicago sativa* and *Lactuca sativa*) while they grew in municipal wastewater as the first treatment system. Also, the removal efficiency of these plants during 9 months experiments was compared.

Experiment

Pilot experimental set-up

A pilot experimental system was established in Ekbatan wastewater treatment plant and the study was carried out from April 2015 to December 2015. In Iran, the spring begin on April while the summer and autumn begin on July and October, respectively. The system was comprised of five horizontal subsurface flow CW units in parallel with a different plant species each: CW1 (unplanted), CW2 (*Medicago sativa*) CW3 (*Lactuca sativa*), CW4 (*Phragmites australis*) and CW5 (Mixture of *Medicago sativa* and *Lactuca sativa*) as shown in Figure 1.



Figure 1. Plant cultivation in separate reactors

Each CW unit has length of 1.15, width of 0.75 and depth of 0.6 meters. Inside the reactor was completed with stones of various diameters as larger stones (15-32 mm) were placed at the bottom, medium (9.5-15 mm) and small (6-9 mm) placed at the middle and the top. The wastewater was entered with a flow rate of (0.093 L/day) to the system continually. The length of *M. sativa* root was inside the sand 10 cm while it was 6 cm for *L. sativa* is 6 cm (in a radius way). In the case of *P. australis*, the bushy root reached to the bottom of the soil. The overall design of pilot study is shown in Figure 2.

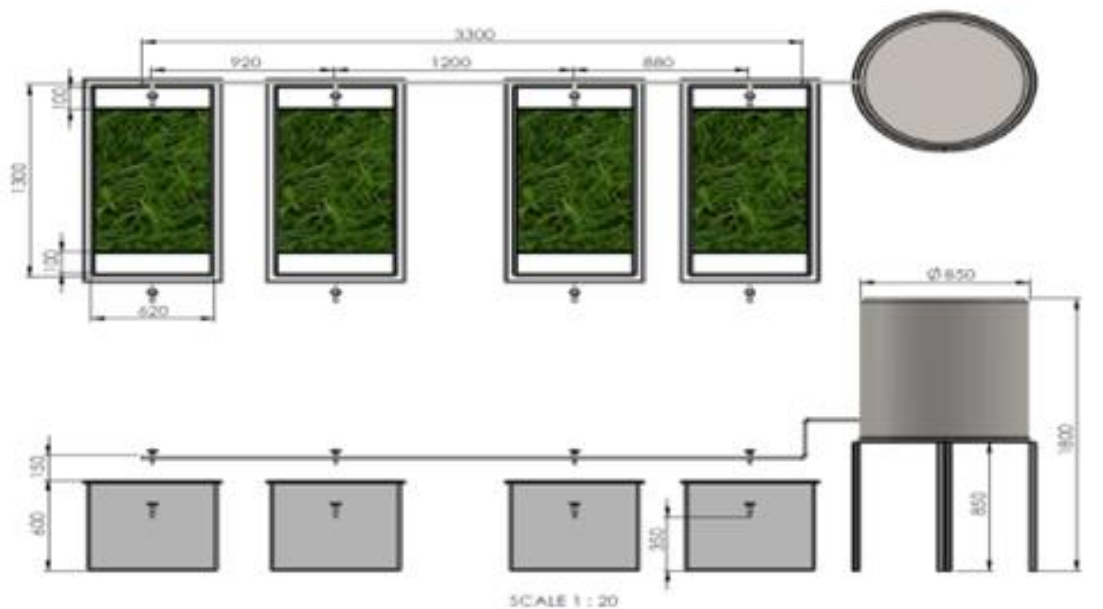


Figure 2. Design of horizontal subsurface flow constructed wetland in the study

Water sampling and analysis

The influent comes from raw wastewater as first treatment system which located at Ekbatan township in Tehran. The samples were collected from influent and effluent of each CWs daily for the analyses. The sampling last for 10 days of each month (standard deviation) and each test was conducted in triplicates. All the parameters were investigated in accordance to APHA (2005) BOD, COD and TSS were measured by

following methods: BOD₅ determined using 5-Day BOD test method, COD by colorimetric method (5220-D) and TSS by using Method No. 2540D. The total P was measured using the vanado-molybdate colorimetric method by measuring the absorbance at a wavelength of 420 nm (Fiske and Subbarow, 1925). Kjeldahl nitrogen was measured using APHA (2005).

Results and discussion

The removal efficiency of each plant in CWs during 9 months in different seasons was investigated and discussed as shows in *Table 1*.

Table 1. Removal efficiency based on different CWs

CWs	Plant species	Removal efficiency		
		Spring	Summer	Autumn
1	<i>Medicago Sativa</i>	low	high	moderate
2	<i>Lactuca sativa</i>	moderate	high	moderate
3	<i>Phragmites Australis</i>	moderate	high	moderate
4	<i>Medicago Sativa & Lactuca sativa</i>	moderate	high	moderate

Medicago sativa

As shown in *Figure 3* during the first months of plant operation, COD decreased gradually which the lowest was 385 on 5 month in the summer. It showed the linear and stable reduction till end of the experiment. The reduction was around 50% using *Medicago sativa* for the treatment of municipal wastewater. Similarly, BOD showed same reduction while after month 5 (35%), small increases observed which may related to biomass growth and seasonal changes. In regard to nutrient removal like P and TN, the reduction occurred till 4 month (summer). In summer, the amount of P and TN increased slightly while was fluctuated for TN. During autumn, P values in water decreased proportionally while TN showed lesser reduction rate by 25%. In regard to TSS, it increased sharply till from spring till end of summer (6 months) which the highest was by 120% on 6 months. Then, it decrease during autumn till end of experiment.

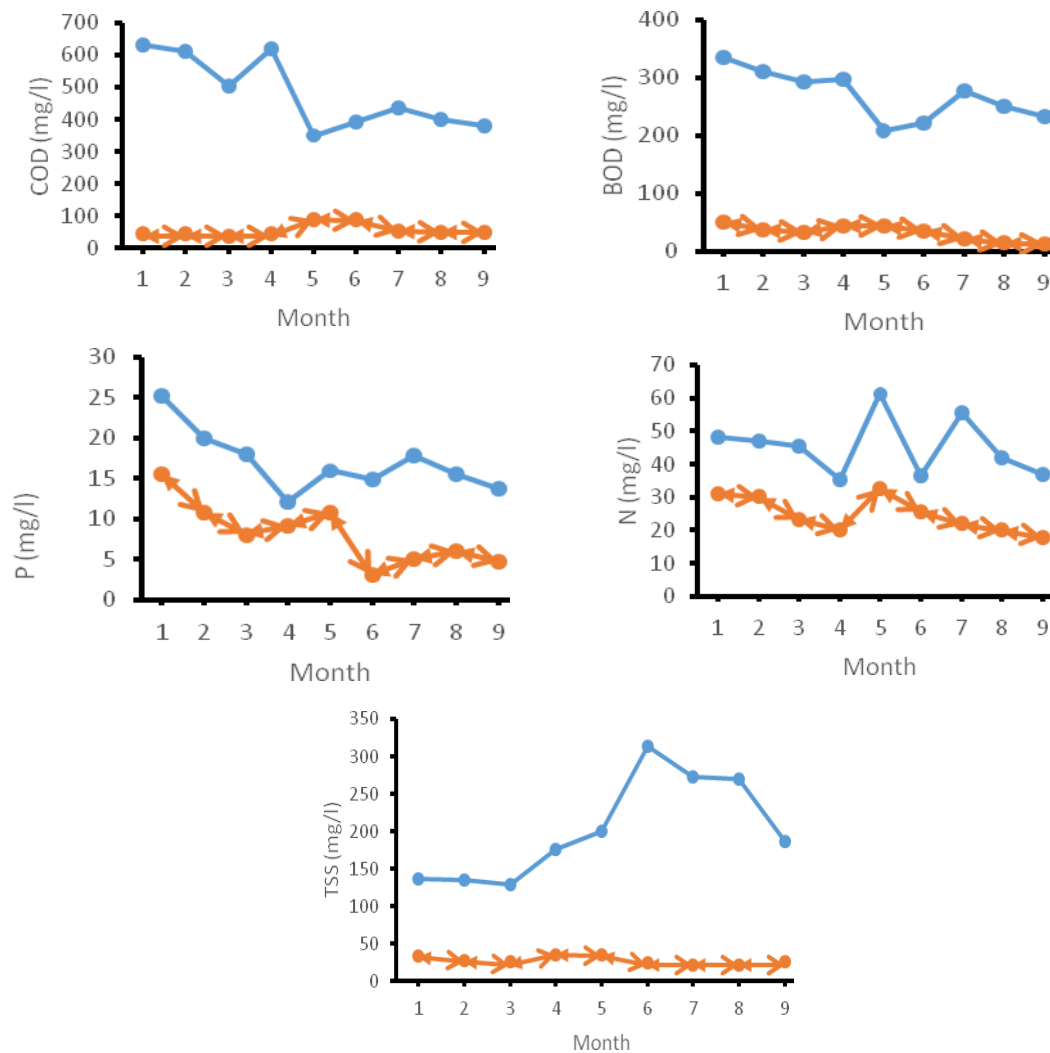


Figure 3. Nutrient removal by *M. sativa*

Lactuca sativa

There is no studies which used *Lactuca sativa* for wastewater treatment. This plant reduced COD by 40% during first five months of the experiment. Then, COD increased during autumn till end of the experiment. In regard to BOD, similar reduction occurred which was highest by 35% on middle of summer after 5 months of the experiment. *L. sativa* had similar removal reduction pattern for T and TN which reduced after 4 months of the experiment. The highest removal was 60% and 30% for P and TN, respectively. By using *Lactuca sativa*, TSS was increased till end of summer by 100% and then decreased till end of autumn (Figure 4).

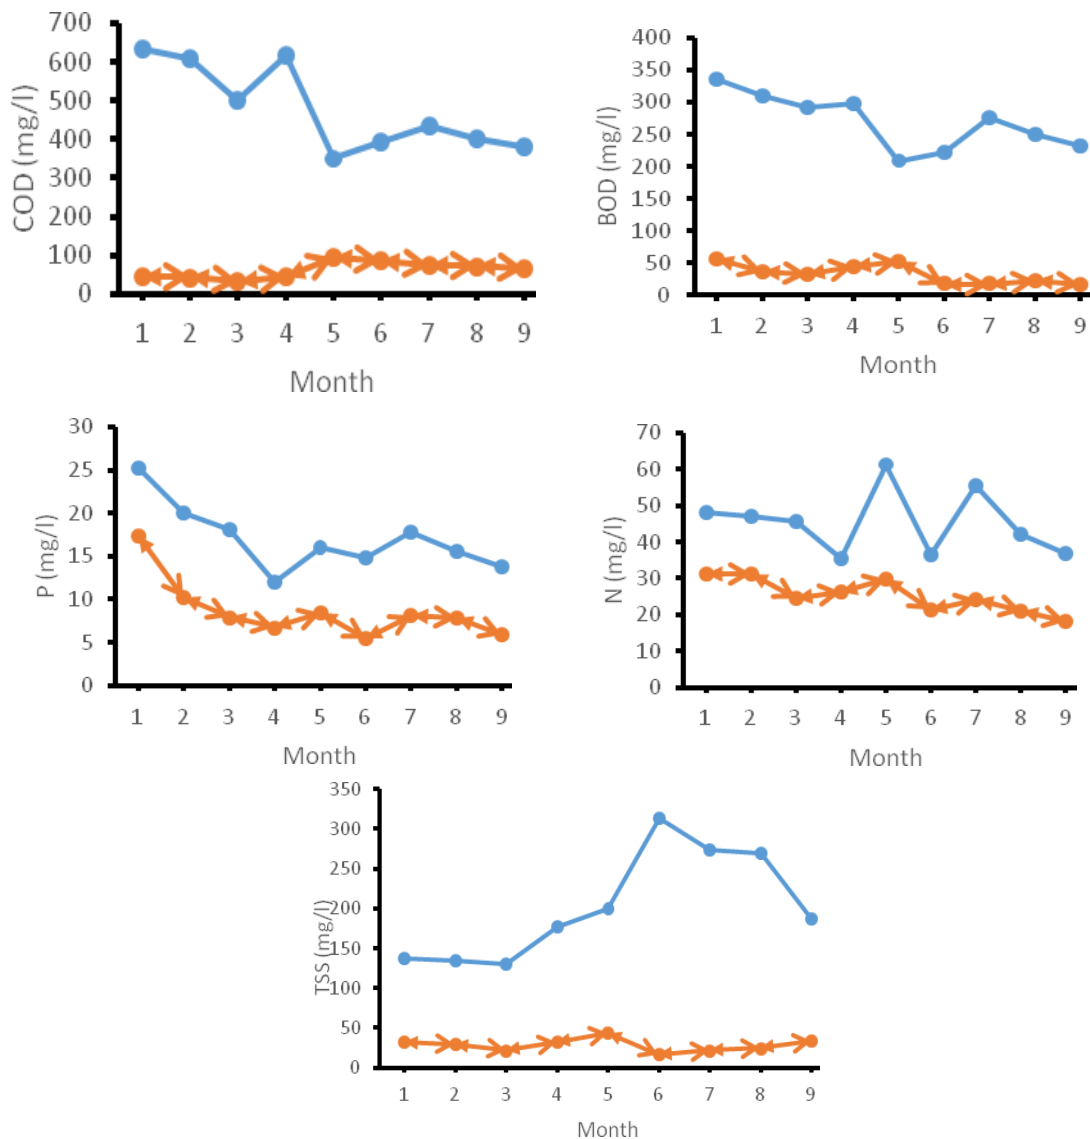


Figure 4. Nutrient removal by *L. sativa*

Phragmites australis

Many studies showed the efficiency of *P. australis* in removal of nutrient from different types of wastewater. This plant was effective in removal of BOD and COD over the five years (Březinová and Vymazal, 2014). Although, Carballeira et al. (2016) found that the high increases in TSS by using *P. australis*. In this study, *P. australis* removed COD and BOD by 40% and 30% till end of summer, respectively. Similarly, P and TN removed significantly till starting of summer by 65% and 30% respectively. Fuchs et al. (2011) found lesser removal rate of TN and P using *Phragmites australis* which was as 35.6 % and 31% respectively. As indicated by Carballeira et al. (2016), *P. australis* had an intermediate biomass production rate and an increased nitrogen removal rate by approximately 30% in comparison with the control. As shown in Figure 5, TSS increased till end of summer and was decreased during autumn proportionally.

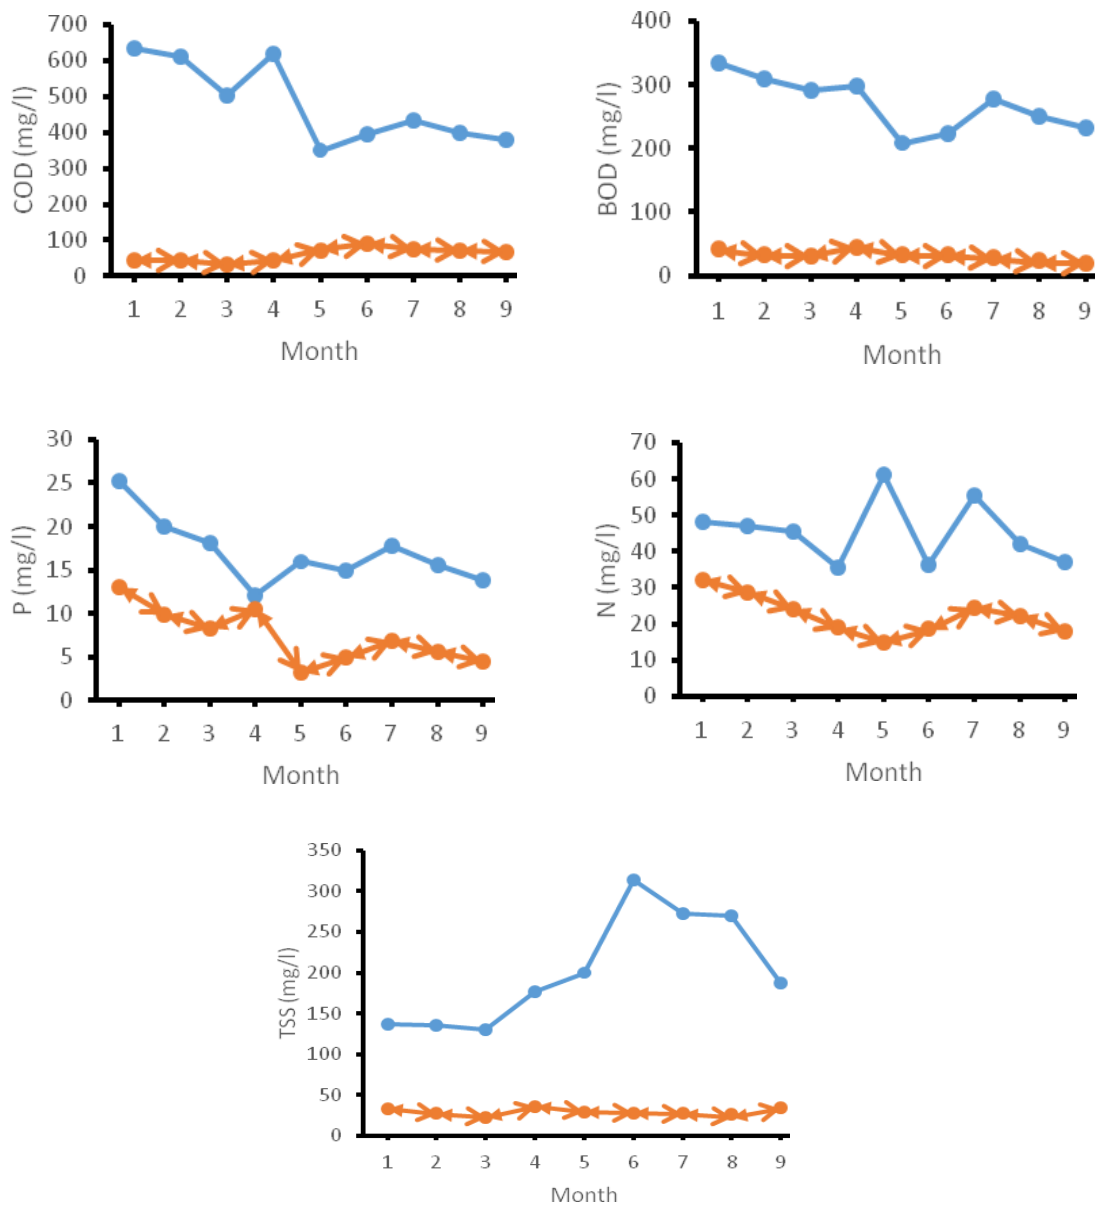


Figure 5. Nutrient removal by *P. Australis*

Mix of *L. sativa* and *M. sativa*

As shown in Figure 6, in the CWs contains mixture of *L. sativa* and *M. sativa*, similar observation of reduction was observed. The obtained results showed in was inconsistency with reduction of these plants when they culture in CWs alone. Most of the reduction occurred during summer while it was lesser during autumn. Highest removal of most of the parameters was in summer which followed by autumn and the lowest was in spring (Figure 6). It shows that the duration and season are the important factors which influenced removal efficiency.

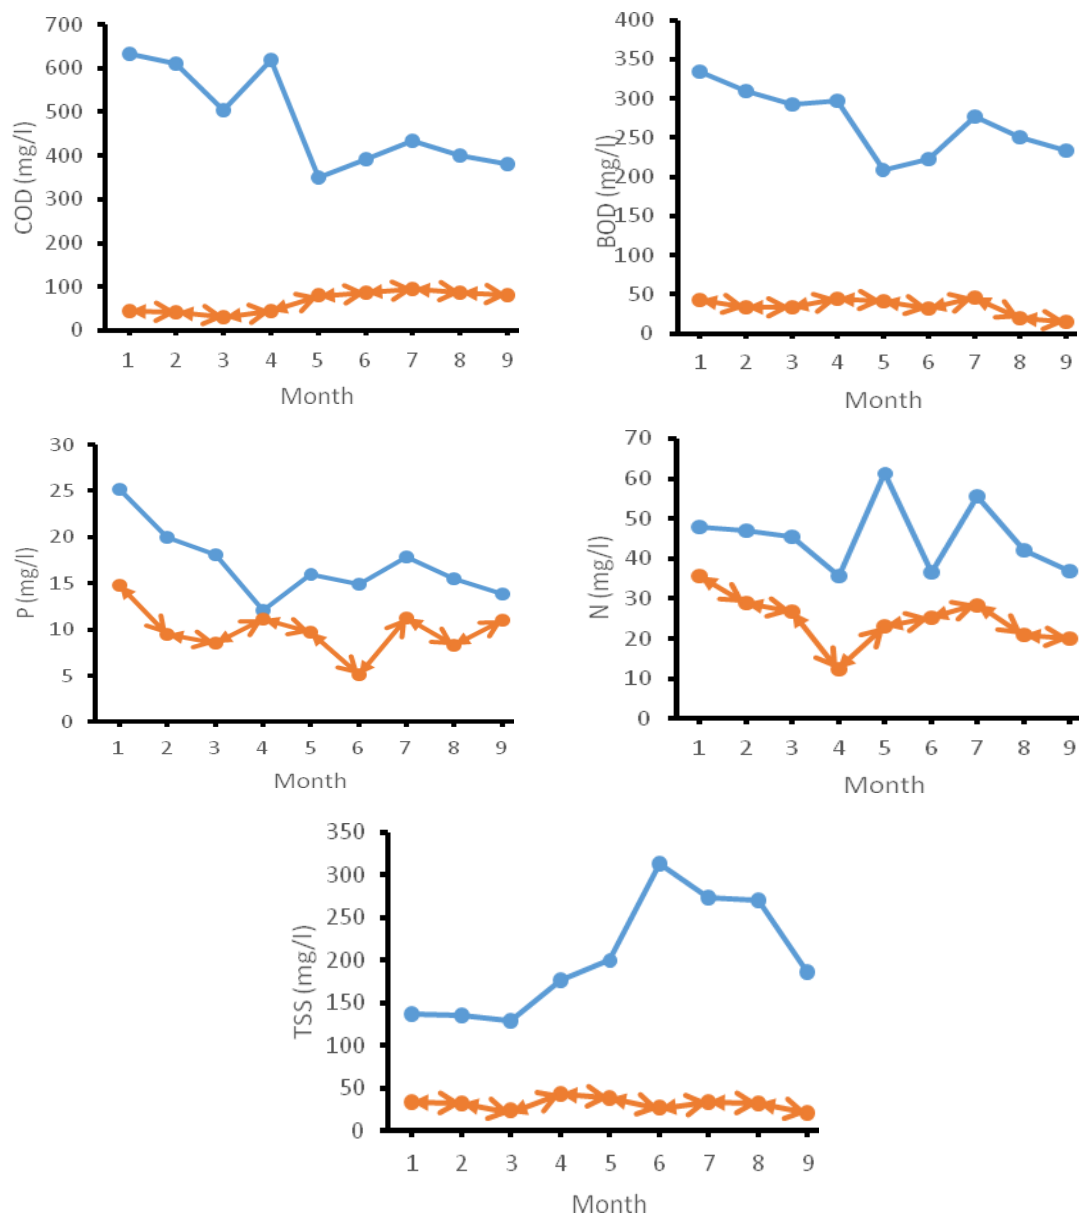


Figure 6. Nutrient removal by mix of *L. sativa* & *M. sativa*

Conclusion

In this study, the effectiveness of nutrient removal by *Medicago sativa*, *Lactuca sativa*, *Phragmites australis* and mixture of (*Medicago sativa* and *Lactuca sativa*) in farictaed CWs was investigated. Different parameters like COD, BOD, TSS, P and TN measured during 9 months treatment system of municipal wastewater. Similar reduction pattern was observed during experiment while the highest reduction occurred during summer which followed by spring and autumn, respectively. In terms of removal efficiency in CWs, the highest reduction obtained using *Phragmites australis* which followed by (*Medicago sativa* and *Lactuca sativa*), *Medicago sativa* and *Lactuca sativa*. The average of removal rate was for COD (40-65%), BOD (30-50%), TSS (100-120% increase), P (40-60%) and TN (25-35%). This study proved that the horizontal

subsurface flow CWs are the effective method for wastewater treatment for initial and secondary treatment.

Acknowledgment. The authors would like to take this opportunity and express their gratitude to the former and current managers; Mr. Safarkhanloo, Mr. Ghasemi and Ms. Anbir and her colleagues. The sincere appreciation goes to Tehran Water and wastewater treatment and provision center for fully supporting the implementation of this study.

Conflict of Interest. The authors certify that they have NO affiliations with or involvement in any organization or entity with any financial interest.

REFERENCES

- [1] APHA. (2005): Standard Methods for the Examination of Water and Wastewater (21st ed. pp.10-15). – American Public Health Association, Washington D.C.
- [2] Březinová, T., Vymazal, J. (2014): Competition of *Phragmites australis* and *Phalaris arundinacea* in constructed wetlands with horizontal subsurface flow—does it affect BOD₅, COD and TSS removal? – Ecological Engineering 73: 53-57.
- [3] Brisson, J., Chazarenc, F. (2009): Maximizing pollutant removal in constructed wetlands: should we pay more attention to macrophyte species selection? – Science of the Total Environment 407(13): 3923-3930.
- [4] Carballeira, T., Ruiz, I., Soto, M. (2016). Effect of plants and surface loading rate on the treatment efficiency of shallow subsurface constructed wetlands. – Ecological Engineering 90: 203-214.
- [5] Chang, H. Q., Yang, X. E., Fang, Y. Y., Pu, P. M., Li, Z. K., Rengel, Z. (2006): In-situ nitrogen removal from the eutrophic water by microbial-plant integrated system. – Journal of Zhejiang University SCIENCE B 7(7): 521-531.
- [6] Chen, G. Q., Shao, L., Chen, Z. M., Li, Z., Zhang, B., Chen, H., Wu, Z. (2011): Low-carbon assessment for ecological wastewater treatment by a constructed wetland in Beijing. – Ecological Engineering 37(4): 622-628.
- [7] Engloner, A. I. (2004): Annual growth dynamics and morphological differences of reed (*Phragmites australis* [Cav.] Trin. ex Steudel) in relation to water supply. – Flora-Morphology, Distribution, Functional Ecology of Plants 199(3): 256-262.
- [8] Engloner, A. I. (2009): Structure, growth dynamics and biomass of reed (*Phragmites australis*)—A review. – Flora-Morphology, Distribution, Functional Ecology of Plants 204(5): 331-346.
- [9] Fiske, C. H., Subbarow, Y. (1925): The colorimetric determination of phosphorus. – Journal of Biological Chemistry 66(2): 375-400.
- [10] Fuchs, V. J., Mihelcic, J. R., Gierke, J. S. (2011). Life cycle assessment of vertical and horizontal flow constructed wetlands for wastewater treatment considering nitrogen and carbon greenhouse gas emissions. – Water research 45(5): 2073-2081.
- [11] Lissy, A. M. P. N., Madhu, B. D. G. (2010): Removal of heavy metals from waste water using water hyacinth. – ACEEE International Journal on Transportation and Urban Development 1(1): 48-52.
- [12] Marchand, L., Mench, M., Jacob, D. L., Otte, M. L. (2010): Metal and metalloid removal in constructed wetlands, with emphasis on the importance of plants and standardized measurements: a review. – Environmental Pollution 158(12): 3447-3461.
- [13] Pedescoll, A., Sidrach-Cardona, R., Hijosa-Valsero, M., Bécares, E. (2015): Design parameters affecting metals removal in horizontal constructed wetlands for domestic wastewater treatment. – Ecological Engineering 80: 92-99.

- [14] Qasaimeh, A., AlSharie, H., Masoud, T. (2015): A Review on Constructed Wetlands Components and Heavy Metal Removal from Wastewater. – Journal of Environmental Protection 6: 710-718.
- [15] Rezania, S., Ponraj, M., Talaiekhosani, A., Mohamad, S. E., Din, M. F. M., Taib, S. M., Sairan, F. M. (2015): Perspectives of phytoremediation using water hyacinth for removal of heavy metals, organic and inorganic pollutants in wastewater. – Journal of environmental management 163: 125-133.
- [16] Tanner, C. C. (2001): Plants as ecosystem engineers in subsurface-flow treatment wetlands. – Water Science and Technology 44(11-12): 9-17.
- [17] Vymazal, J. (2010): Constructed wetlands for wastewater treatment: five decades of experience. – Environmental science & technology 45(1): 61-69.
- [18] Vymazal, J. (2013): Vegetation development in subsurface flow constructed wetlands in the Czech Republic. – Ecological Engineering 61: 575-581.
- [19] Vymazal, J., Březinová, T. (2016): Accumulation of heavy metals in aboveground biomass of *Phragmites australis* in horizontal flow constructed wetlands for wastewater treatment: A review. – Chemical Engineering Journal 290: 232-242.
- [20] Zhang, C. B., Wang, J., Liu, W. L., Zhu, S. X., Liu, D., Chang, S. X., Ge, Y. (2010): Effects of plant diversity on nutrient retention and enzyme activities in a full-scale constructed wetland. – Bioresource technology 101(6): 1686-1692.